

SMD Circulator 表贴式环形器

H120A Series

1.Features 产品特点

UMTS, LTE , 5G NR Band



PCB Soldering Re-flow

Wide Operation Temperature Range -45 ~ 125°C

Compact Package Design for PCB Applications

2.Dimensions 尺寸展示

Unit:mm

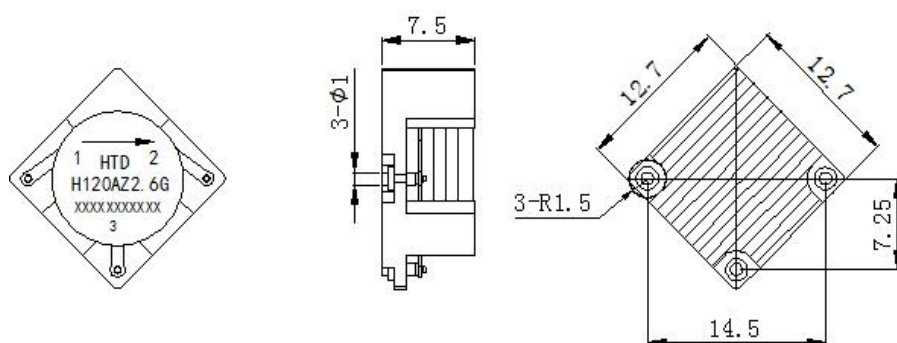

3.Specifications 规格参数

Part No.	Frequency (GHz)		Center Frequency	Bandwidth	Isolation	INS LOSS	VSWR	Power	IMD (@2X43dBm)
	F1	F2	(GHz)	(GHz)	(dB) MIN	(dB) MAX	(dB) MAX	(W)	(-dBc) MAX
H120AZ1.9G	1.880	2.050	1.9650	0.170	23	0.3	1.15	80	-65
H120AZ2.6G	2.490	2.690	2.5900	0.200	23	0.3	1.15	80	-65
H120AZ3.6G	3.500	3.700	3.6000	0.200	23	0.3	1.15	80	-65